
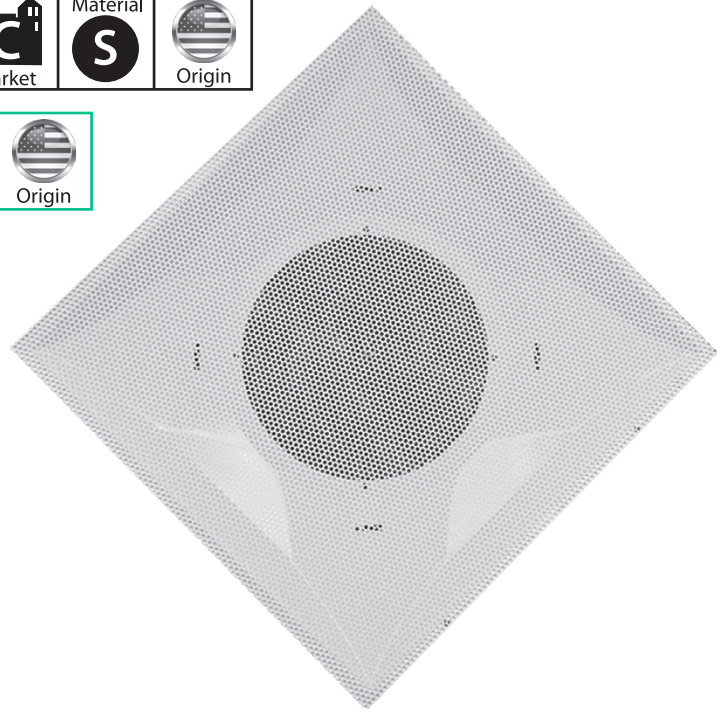



Series 6500/A6500

T-bar Grille

- ☐ Perforated face
- ☐ Return Air Application
- ☐ Steel construction (6500)
- ☐ Aluminum construction (A6500)
- ☐ Fixed collar and no collar models
- ☐ No insulation
- ☐ White finish
- ☐ Made in the U.S.A.



Dimensional Drawing

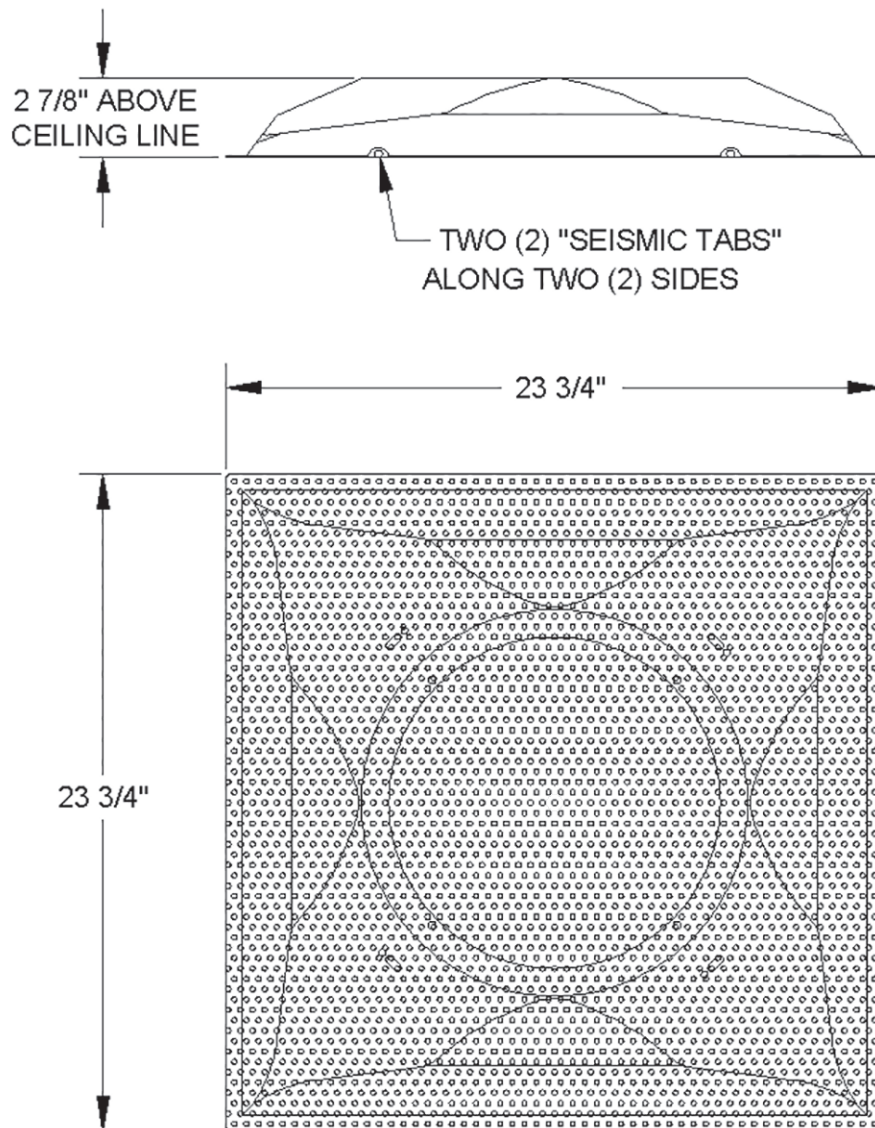

Performance Data, Series 6500/A6500

Collar Size ↓	Neck Velocity →	300	400	500	600	700	800	900	1000
6" An .20	Cfm	60	80	100	120	140	160	180	200
	Ps	<.01	.011	.017	.024	.032	.042	.054	.066
7" An .27	Cfm	81	108	135	162	189	216	243	270
	Ps	<.01	.011	.017	.024	.032	.042	.054	.067
8" An .35	Cfm	105	140	175	210	245	280	315	350
	Ps	<.01	.011	.017	.024	.033	.043	.054	.067
9" An .44	Cfm	132	176	220	264	308	352	396	440
	Ps	<.01	.011	.017	.024	.033	.043	.055	.068
10" An .54	Cfm	165	220	275	330	385	440	495	550
	Ps	<.01	.012	.017	.024	.034	.043	.056	.068
12" An .78	Cfm	237	316	395	474	553	632	711	790
	Ps	<.01	.016	.026	.037	.050	.065	.080	.100
14" An 1.07	Cfm	321	428	535	642	749	856	963	1070
	Ps	<.01	.016	.026	.037	.050	.065	.083	.125