



Series FBFGTB/AFBFGTB

T-Bar Filter Grille


- Flush, removeable face
- Concealed hinges and latches
- Fixed bars at 60° deflection
- Sizing options for common lay-in applications
- R6 fiberglass plenum option (2' x 2' only)
- Steel construction (FBFGTB)
- Aluminum** construction (AFBFGTB)
- Uses standard (20 x 20") filter (not included)
- White finish
- Made in the U.S.A.

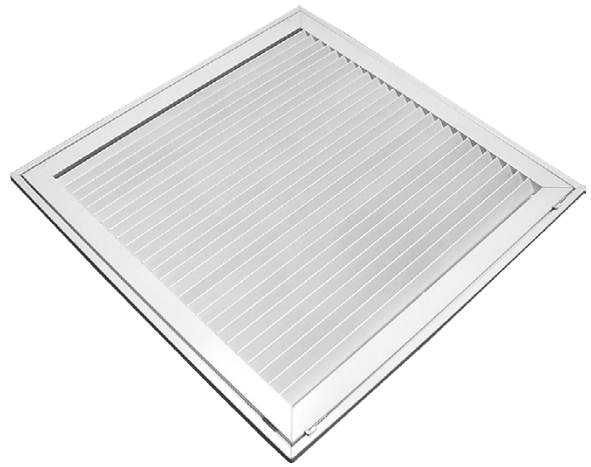

Now with
 Duct Board
 Plenum
 Option.
 See p. 228



Dimensional Drawing

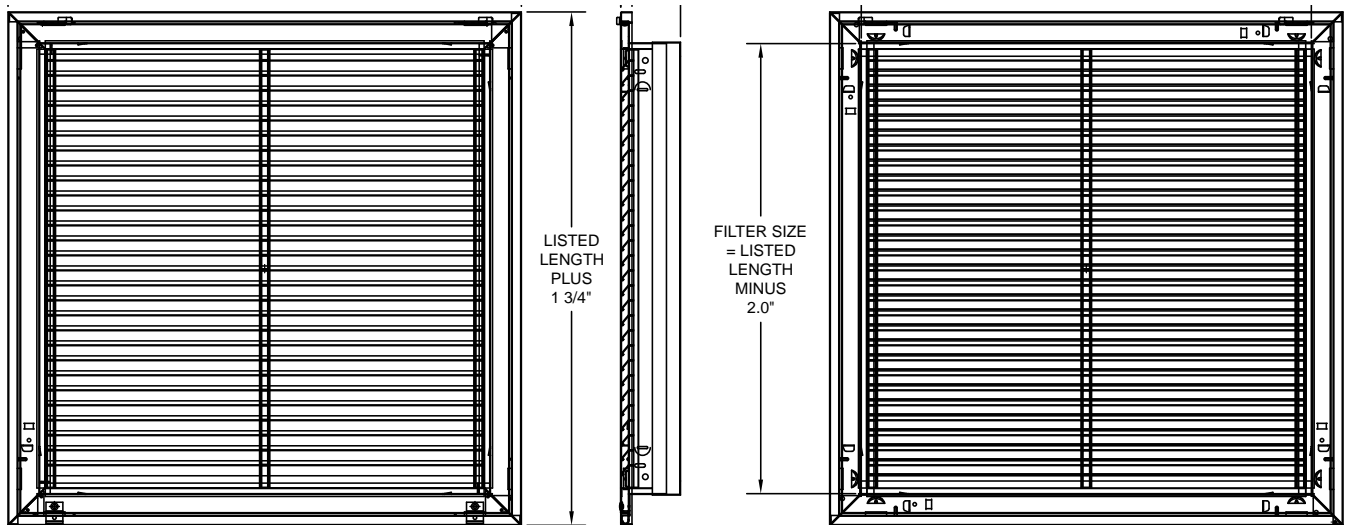

Performance Data, Series FBFGTB/AFBFGTB (for 24" x 24" size only)

Unit Size	Velocity →	400	600	800	1000
24" x 24" Ak 1.87	Cfm	750	1125	1500	1875
	Pt	0.01	0.03	0.03	0.05

Pt = Total Pressure. The sum of the Static and Velocity pressures. Measured in inches of H₂O.
 Tested without filter.

Specifications for typical, high-capacity, pleated panel filter rated at 175 fpm medium and 350 fpm high. Resistance measured at capacity (inches w.g.):

	Cfm	Resistance
Medium	700	0.12
High	1400	0.25

Commercial
T-bar (lay-in)