


AIRJET[®]
Chimney and Venting Systems



Listed




For Gas and Propane Installations

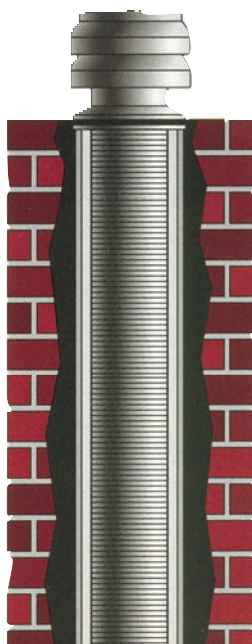

DRIP-FREE CHIMNEY LINER SYSTEM

NEW


FLEXJET[™]

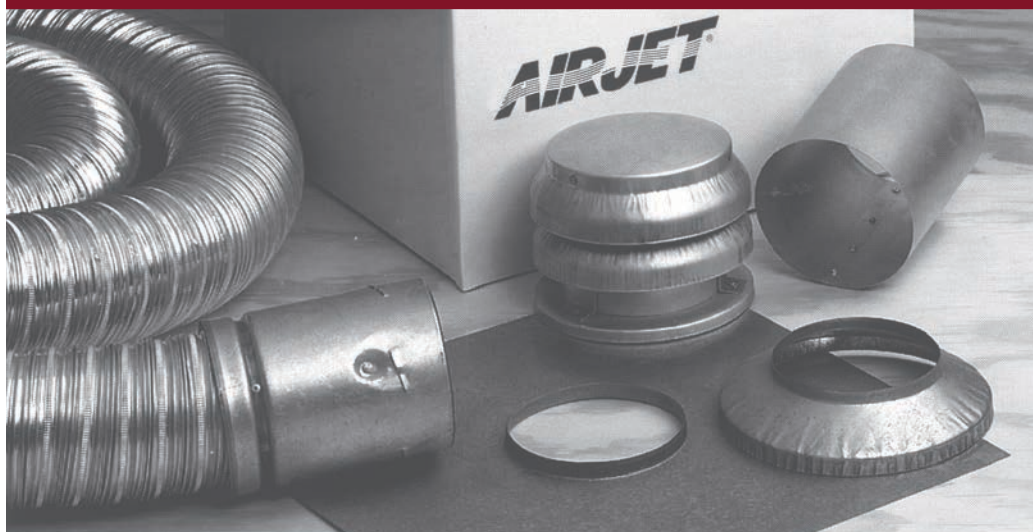

Easy To Install Kit Helps Prevent Callbacks

Flexjet continuous 2-ply aluminum chimney liner is tough, flexible and “easy to work with”. Coupled with its unique termination fittings, the drip-free design helps prevent acidic condensate from leaking and causing corrosion. Assures drip-free connections and well insulated performance when venting gas-fired equipment through masonry chimneys. Available in a wide range of diameters and continuous lengths. UPSable kits.

The integral top termination/connector fitting on every Flexjet kit provides fast termination on an all-flex system. It doubles as a positive connection when using additional lengths of “B” vent pipe on top in a combination system. Totally drip-free.

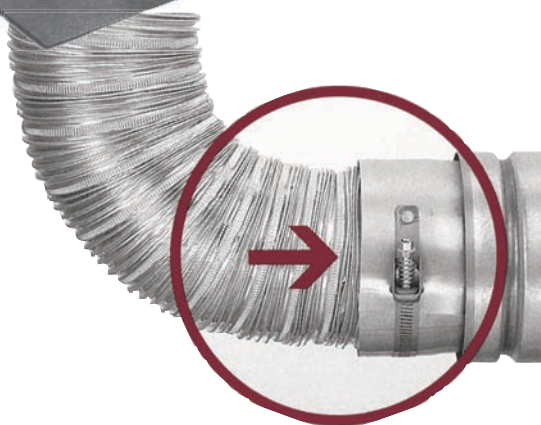

Exclusive Drip-Free Connectors

Unlike competitive models, AirJet chimney liner installs inside the bottom connector fitting so acidic condensate stays inside the liner until it is exhausted up and out of the chimney as water vapor. To connect, simply cut the continuous liner to the exact length and attach the Flexjet connector. It's the only fitting in the business that prevents condensate drip and corrosion at this critical connection point. Double-wall (shown) and single-wall connector fittings available.

Chimney liners are required by the National Fuel Gas Code for most installations with 80% efficient gas-fired equipment. The chimney liner prevents dangerous gas condensate from deteriorating the chimney, interior walls and ceilings. It also helps prevent indoor air pollution and dangerous carbon monoxide fumes.


Tough, 2-ply aluminum Flexjet chimney liner is the easiest solution to this problem with its drip-free design, flexibility of installation and wide range of lengths and kits

THE SAFE, VERSATILE SOLUTION TO CHIMNEY LINING



Interior Chimney Application

All Flexjet liner within the chimney

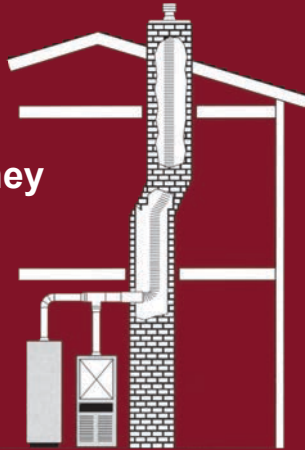

Exterior Chimney Application

Combination "B" vent and Flexjet liner system



(Shown at left)

Standard Kit includes: Liner, Flashing, Jet Cap, Motar, and Storm Collar.

Kits available in diameters of 3", 4", 5", 5 1/2", 6", 7", 8", and 10". Continuous 25' and 35' Lengths. 10' splicer lengths also available.

Other lengths and diameters also available. 5 1/2" diameter is ideal for standard chimney tiles (6 1/4" x 6 1/4" inside dimensions). Easier to install than standard 6" diameter chimney liner with more capacity than 5" chimney liner.

Also available: (shown at right) Starter Cone, Double-Wall Connector Fitting, Single-Wall Connector/Splicer Fitting. For shipping efficiency, chimney liner is compressed to 1/3 of actual length. Standard 3" through 6" diameter. Kits shippable via UPS.



AJ/FL101 0106 3MPS

Quality and Service for over 50 years.

AirJet, Inc. - 3020 Mine Road - Fredericksburg, VA 22408
Phone 866-3AIRJET Facsimile (574) 262-2075