


Series C44


Curved Blade

Sidewall/Ceiling Register

- Multi-shutter damper
- 4-way diffusion
- White finish
- Made in the U.S.A.



Dimensional Drawings

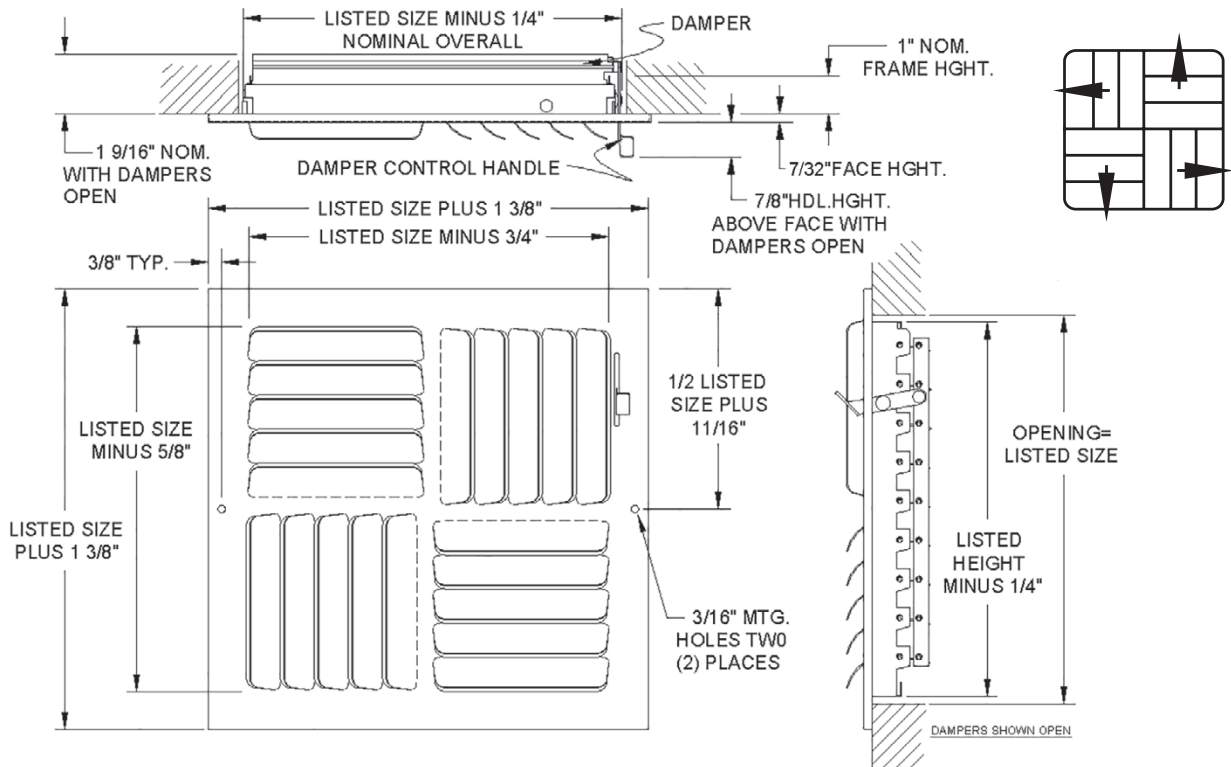

Performance Data, Series C44

Unit Size (in.)	Overall Size (in.)	Face Velocity	300	400	500	600	700	800	900	1000
			Pressure Loss	.006	.010	.016	.022	.031	.040	.050
6 x 6 Ak .115	7-3/8 x 7-3/8	Cfm	36	48	60	72	84	96	108	120
		Throw	2	3	3	4	5	6	6	7
8 x 8 Ak .153	9-3/8 x 9-3/8	Cfm	48	64	80	96	112	128	144	160
		Throw	3	4	5	6	7	8	9	10
10 x 10 Ak .264	11-3/8 x 11-3/8	Cfm	77	103	129	154	180	206	231	257
		Throw	4	5	6	7	8	9	10	11
12 x 12 Ak .382	13-3/8 x 13-3/8	Cfm	117	156	195	233	272	311	350	389
		Throw	5	6	7	8	9	10	11	12
14 x 14 Ak .528	15-3/8 x 15-3/8	Cfm	161	214	268	321	375	428	482	535
		Throw	5	7	8	10	11	13	15	16
16 x 16 Ak .689	17-3/8 x 17-3/8	Cfm	210	279	350	419	489	559	629	698
		Throw	6	9	10	13	14	17	19	21

Terminal Velocity of 75 fpm

Series AC44


Curved Blade

Sidewall/Ceiling Register

- Multi-shutter damper
- 4-way diffusion
- Aluminum construction
- White finish
- Made in the U.S.A.



Dimensional Drawings

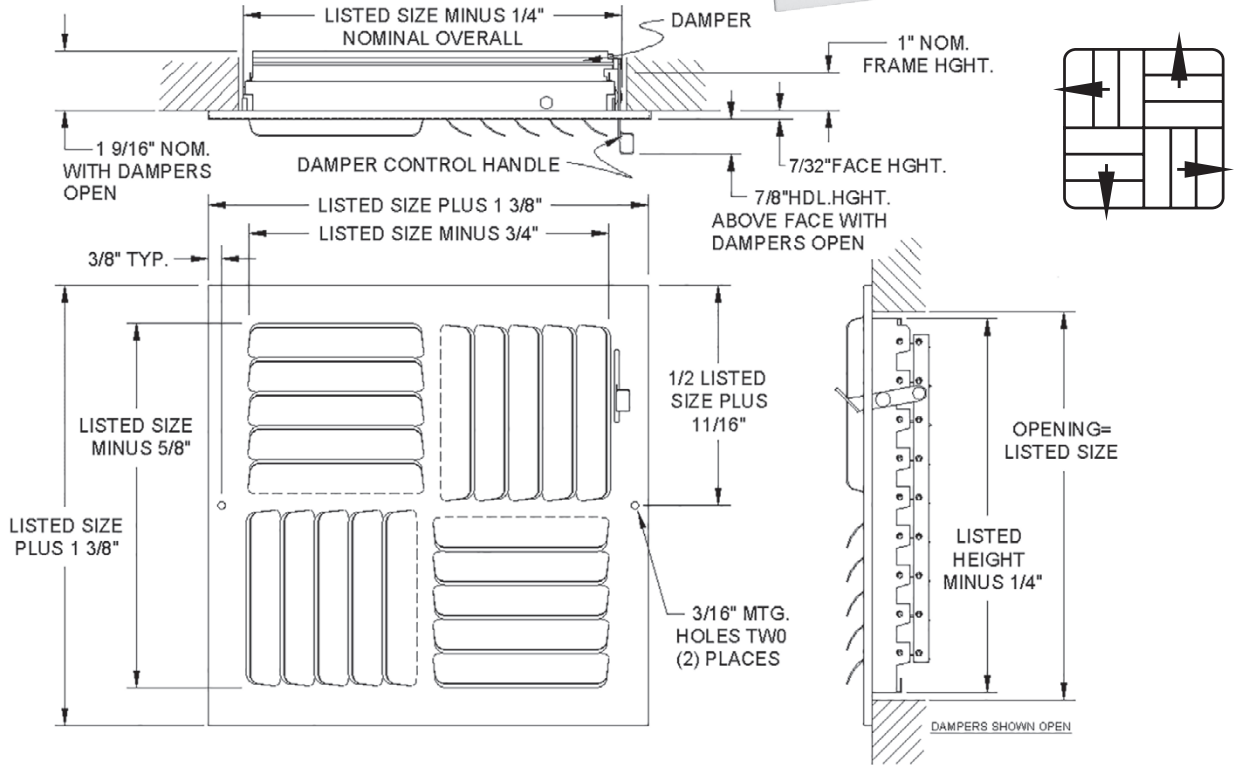

Residential Sidewall or Ceiling

Performance Data, Series AC44

Unit Size (in.)	Overall Size (in.)	Face Velocity	300	400	500	600	700	800	900	1000
			Pressure Loss	.006	.010	.016	.022	.031	.040	.050
8 x 8 Ak .153	9-3/8 x 9-3/8	Cfm	48	64	80	96	112	128	144	160
		Throw	3	4	5	6	7	8	9	10
10 x 10 Ak .264	11-3/8 x 11-3/8	Cfm	77	103	129	154	180	206	231	257
		Throw	4	5	6	7	8	9	10	11
12 x 12 Ak .382	13-3/8 x 13-3/8	Cfm	117	156	195	233	272	311	350	389
		Throw	5	6	7	8	9	10	11	12
14 x 14 Ak .528	15-3/8 x 15-3/8	Cfm	161	214	268	321	375	428	482	535
		Throw	5	7	8	10	11	13	15	16

Terminal Velocity of 75 fpm