




# Series HVGTB/AHVGTB T-Bar Supply Grille



- Double deflection; adjustable blades
- Horizontal front blades; vertical rear blades
- 3/4" spacing for easy adjustment
- Sizing options for common lay-in applications
- Steel construction (HVGTB)
- Aluminum construction (AHVGTB)
- White finish
- Made in the U.S.A.

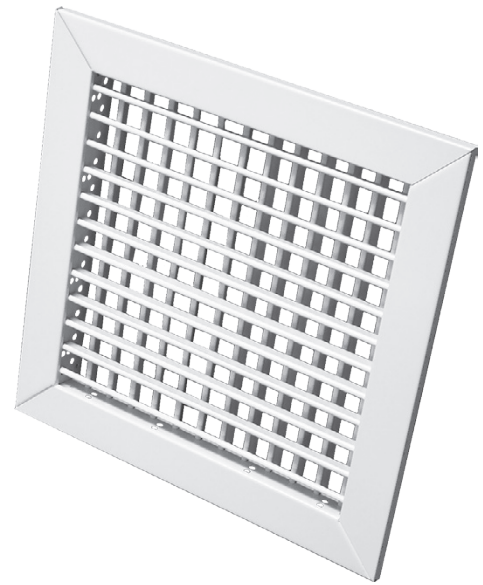

## Dimensional Drawing

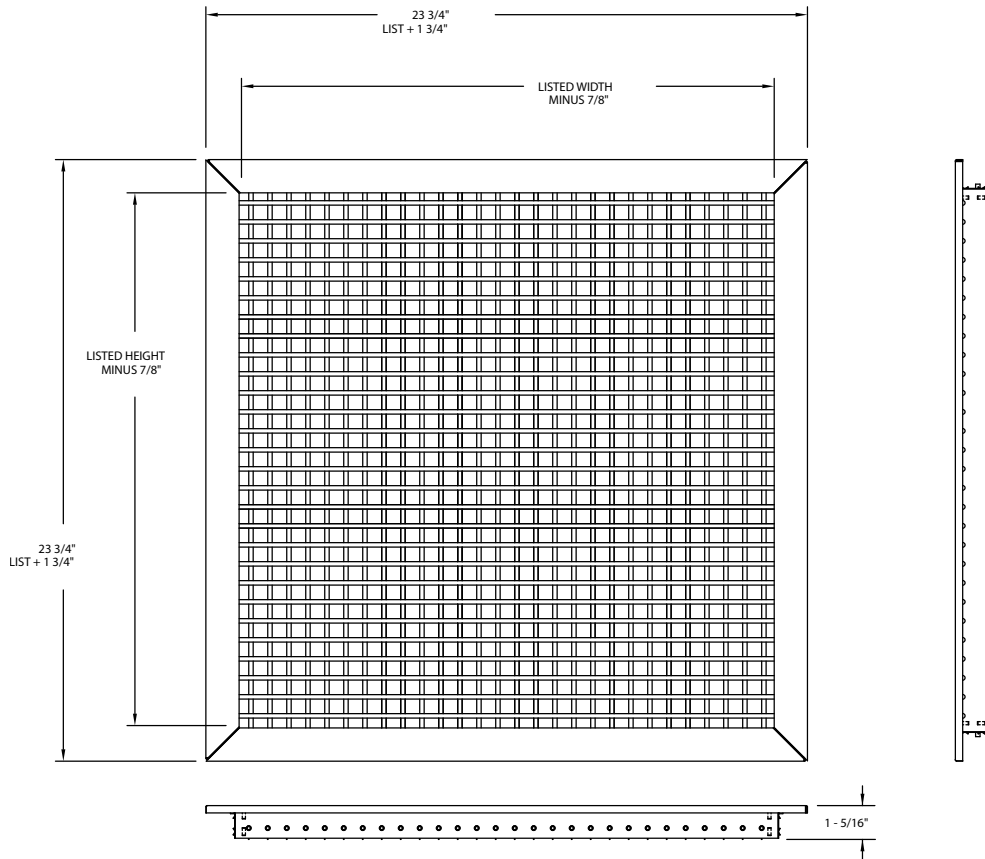

### Appearance Note

A reinforcement face bar is present on the 2' x 1' model; the 2' x 2' has two such reinforcement bars. (not shown in drawing).

## Performance Data, Series HVGTB/AHVGTB

Unit Size	Overall Size	Face Velocity	300	400	500	600	700	800	900	1000
		Pressure Loss	.006	.010	.016	.022	.031	.040	.050	.062
10 x 10 Ak .485	11 $\frac{3}{4}$ x 11 $\frac{3}{4}$ (1' x 1')	Cfm	146	194	243	292	340	388	437	486
		Throw	7	10	12	15	17	20	22	25
22 x 10 Ak .97	23 $\frac{3}{4}$ x 11 $\frac{3}{4}$ (2' x 1')	Cfm	292	388	486	584	680	776	874	972
		Throw	7	10	12	15	17	20	22	25
22 x 22 Ak 1.94	23 $\frac{3}{4}$ x 23 $\frac{3}{4}$ (2' x 2')	Cfm	584	776	972	1168	1360	1552	1748	1944
		Throw	7	10	12	15	17	20	22	25

Commercial  
T-bar (lay-in)